




DOUBLEFIX INVISIBLE 1,5M ROLL

EXTRA-STRONG, TRANSPARENT DOUBLE-SIDED MOUNTING TAPE

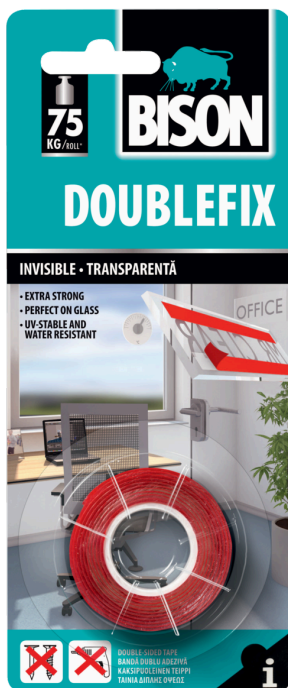

PREPARATION

Working Conditions: The minimum working temperature is 10°C.

Surface Requirements: The surfaces to be glued must be firm, clean, dry, and free of grease and dust.

Preliminary Surface Treatment: For best results, first cleanse the surfaces to be glued (e.g. with alcohol or white spirit).

APPLICATION

Directions for use:

Stick the product onto the object to be mounted without creating air pockets. Remove the protective film without touching the adhesive. Affix the object to the desired spot and press hard for 5 seconds.

Stains/residue: Remove tape residue with white spirit.

Points of attention: Do not touch the adhesive as this reduces the tape's adhesive strength.

PRODUCT DESCRIPTION

Extra-strong, entirely transparent double-sided tape for permanently mounting and affixing objects in indoor and outdoor areas. The invisible alternative to screws and nails. Provides a permanent and secure hold on almost all smooth surfaces, e.g. glass, metal, tiles, plastic, painted wood and stone. Ideal for mounting signs, decorative objects, hooks, holders, decorative profiles, thermometers, house numbers, and much more. Also suitable for use in the shower area and for attaching car accessories. UV stable and waterproof.

FIELD OF APPLICATION

Ideal for mounting signs, decorative objects, hooks, holders, decorative profiles, thermometers, house numbers, etc. on smooth surfaces indoors and outdoors. Suitable for glass, metal, tiles, plastic, painted wood, stone, etc. Also suitable for use in the shower area and for attaching car accessories. Not suitable for rough surfaces.

PROPERTIES

- double-sided mounting tape
- extra-strong
- entirely transparent
- for smooth surfaces
- for indoors and outdoors
- UV stable and waterproof
- extremely temperature resistant
- clean, easy, fast

Our advice is based on extensive research and practical experience. However, in view of the large variety of materials and the conditions under which our products are applied, we assume no responsibility for the results obtained and/or any damage caused by the use of the product. Nevertheless, our Service Department is always at your disposal for any advice needed.



DOUBLEFIX INVISIBLE 1,5M ROLL

EXTRA-STRONG, TRANSPARENT DOUBLE-SIDED MOUNTING TAPE

TECHNICAL SPECIFICATIONS

Carrier type:	Polyethylene foam
Chemical base:	Synthetic rubber
Chemicals resistance:	Moderate
Colour:	White
Holding power:	>168h at RT (3kg)
Initial tack:	High
Minimum temperature resistance:	-10 °C
Maximum temperature resistance:	75 °C
Moisture resistance:	Good
Peel adhesion:	PE 6,0 N/25mm
Tensile Strength (N/25 mm) approx.:	45 N/25 mm
Thickness (mm):	0.9 mm
UV resistance:	Good
Carrier type:	Acrylic foam
Chemical base:	Acrylic
Chemicals resistance:	Very good
Colour:	Transparent
Holding power:	>168 (1kg)
Initial tack:	Extremely high
Minimum temperature resistance:	-40 °C
Maximum temperature resistance:	93 °C
Moisture resistance:	Very good
Peel adhesion:	29 N/25mm
Thickness (mm):	1 mm
UV resistance:	Very good

PACK SIZES

Tape: 1.5 m x 19 mm on blistercard

STORAGE CONDITIONS

At least 24 months after date of manufacture.

Store in a dry, cool and frost-free place.

Our advice is based on extensive research and practical experience. However, in view of the large variety of materials and the conditions under which our products are applied, we assume no responsibility for the results obtained and/or any damage caused by the use of the product. Nevertheless, our Service Department is always at your disposal for any advice needed.